

TEKADOM WATERPROOF COATING

PROPERTIES

- Fast repairs in all weather conditions.
- Suitable for both dry and moist surfaces.
- Good adhesion on any type of material - aluminium, zinc, lead, glass, stone, asphalt, bitumen, hard PVC, roofing tiles, wood, etc.
- Easy application.
- No primer needed.
- It can be applied on vertical surfaces.
- Fills cracks and holes a few millimetres wide.
- Excellent elasticity.
- May be painted with acrylic varnish.
- Totally weather resistant.
- It is not resistant to solvents.
- Not suitable for EPS and PVC films.

USE

- Repairs of various types of leakages and crack filling.
- For sealing chimney flashing, metal edges, roof drains and concrete cracks.
- Protective agent.
- For internal and external use – balconies, terraces, roofs and fences.
- Suitable also for side ditches.
- Suitable for motor vehicles and boats.


TECHNICAL DATA

Fresh sealant

Base	synthetic mastic with solvents; fibre-reinforced
Appearance	grey paste
Curing mechanism	solvent evaporation
Specific gravity	1050±10 kg/m ³
Hardening time	24–48h
Application temperature	between -10°C and 40°C

Cured sealant

Elongation at break	500±50%
Temperature resistance	between -25°C and +100°C
Consumption	1–2 l/m ²

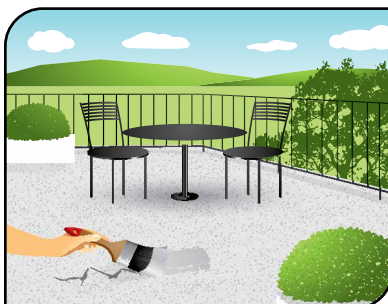

Tekadom Waterproof Coating

This fibre-reinforced coating is used for simple repairs of leakages and crack filling. It provides excellent adhesion on any type of surface even if wet and greasy.

APPLICATION

The surface must be clean and free of loose parts. We apply a thin layer of coating perpendicular to the cracks. In case of extremely wide cracks, a second layer may be applied after a few days. If the coating is very thick, we can dilute it (up to 10%) with Tekafin Cleaner, nitro solvent or a hydrocarbon (petroleum) based cleaning agent so it can be spread across the surface more easily. Tools can be cleaned with Tekafin Cleaner.

PACKAGING

- 1l can
-

STORAGE

18 months in a dry space at temperatures below 30°C, in originally closed packaging.

HEALTH, SAFETY HANDLING AND DISPOSAL INFORMATION

Additional information on safety, safe handling instructions and personal protective equipment as well as disposal information are available in a safety data sheet. Safety data sheet is available upon request. You can also ask your TKK distributor for a copy.

WARNING

Instructions contained in this document are based on our research and experience, however, due to specific conditions and working methods we recommend that you perform preliminary tests prior to any application of our products.